



Bid Project Name:
SKU#
Type:


1x4 Water Proof Strip Light

FEATURES

- 5000K
- Long-life LEDs provide 122,000 hours of operation with at least 70% of initial lumen output (L70).**
- 6240 luminaire lumens
- Uniform illumination with no visible LED pixelation.
- Universal 120-277 AC voltage (50-60Hz) is standard.
- Power factor > 0.95.
- Total harmonic distortion < 10%.
- Color rendering index > 80.
- ABS (acrylonitrile butadiene styrene) housing and polycarbonate lens
- Stainless steel mounting bracket and lens clips are standard.
- Easy installation in new construction or retrofit.



Dimensions

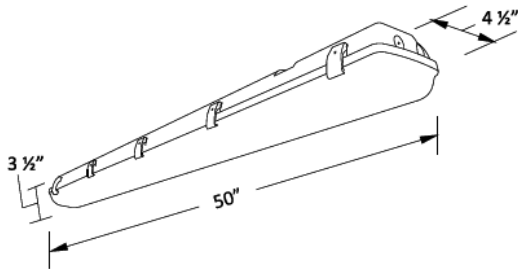


ELECTRICAL DATA

SKU#	COLOR TEMPERATURE	CRI ¹	LUMINAIRE LUMENS	LUMINAIRE WATTS	LUMENS/WATT	INPUT VOLTAGE	INPUT CURRENT (A)			POWER FACTOR	THD ²	L ₇₀ HOURS ³
							120V	240V	277V			
LSW-42DVTX	5000K	>80	5,240	40	131	120-277	0.33	0.17	0.14	>95%	<10%	122,000

PHOTOMETRIC DATA

SKU: LSW-42DVTX

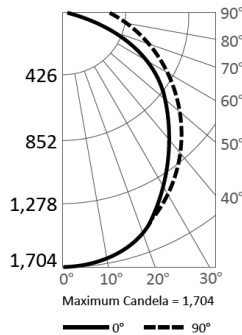

Candlepower Summary

	0°	90°
0°	1,704	1,704
10°	1,665	1,668
20°	1,550	1,547
30°	1,363	1,387
40°	1,125	1,215
50°	862	1,030
60°	599	845
70°	357	668
80°	144	465
90°	20	283

Zonal Lumen Summary

Zone	Lumens	% Fixture
0° - 10°	172	3.3%
0° - 20°	656	12.5%
0° - 30°	1,373	26.2%
0° - 40°	2,218	42.3%
0° - 50°	3,081	58.8%
0° - 60°	3,867	73.8%
0° - 70°	4,510	86.1%
0° - 80°	4,969	94.8%
0° - 90°	5,240	100%
90° - 180°	0	0%
0° - 180°	5,240	100.0%

Cone of Light

