




Bid Project Name:
SKU#
Type:

**FEATURES**

- MEANWELL Driver
- Mounts: direct mount, hook & cord, pendant
- Two lens options are available: flat or 1-inch prismatic drop(to meet your optics needs)
- IP65 water proof design
- Luminaire housing is cast aluminum with integral heat sink
- Direct mount is suitable for use in single or double skin canopies with a minimum 4.0" (102mm) wide panels and a minimum 22 gauge, 0.030" canopy thickness
- Luminaire mounts directly to the canopy deck after drilling a single 2.0" to 4.0" round hole, is secured in place with self-sealing screws that provide water-tight seal and includes 3/4" conduit entry for direct wire feed
- Hook and cord mount includes a 3' cord out of the fixture and is intended to hang from the single hook

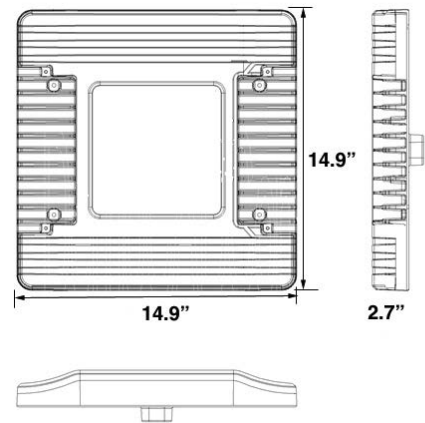

<b>Efficacy:</b>	110LM/W
<b>Input Voltage Range(V):</b>	100-277VAC / 50-60Hz
<b>Beam Angle:</b>	120°
<b>Led:</b>	High Power
<b>Product Dimension:</b>	15"x 15" x 2.36"
<b>Product Weight:</b>	17lbs
<b>Color Temperature:</b>	(CCT) WW3000-3500K
<b>Color Rendering Index (CRI):</b>	≥85
<b>Power Factor:</b>	≥0.9
<b>Operating Temperature:</b>	-20~140°f
<b>Certification:</b>	CE ROHS DLC ETL LM79
<b>Warranty:</b>	5 years
<b>L70 life:</b>	50,000hrs